



POLYBOND

Hose

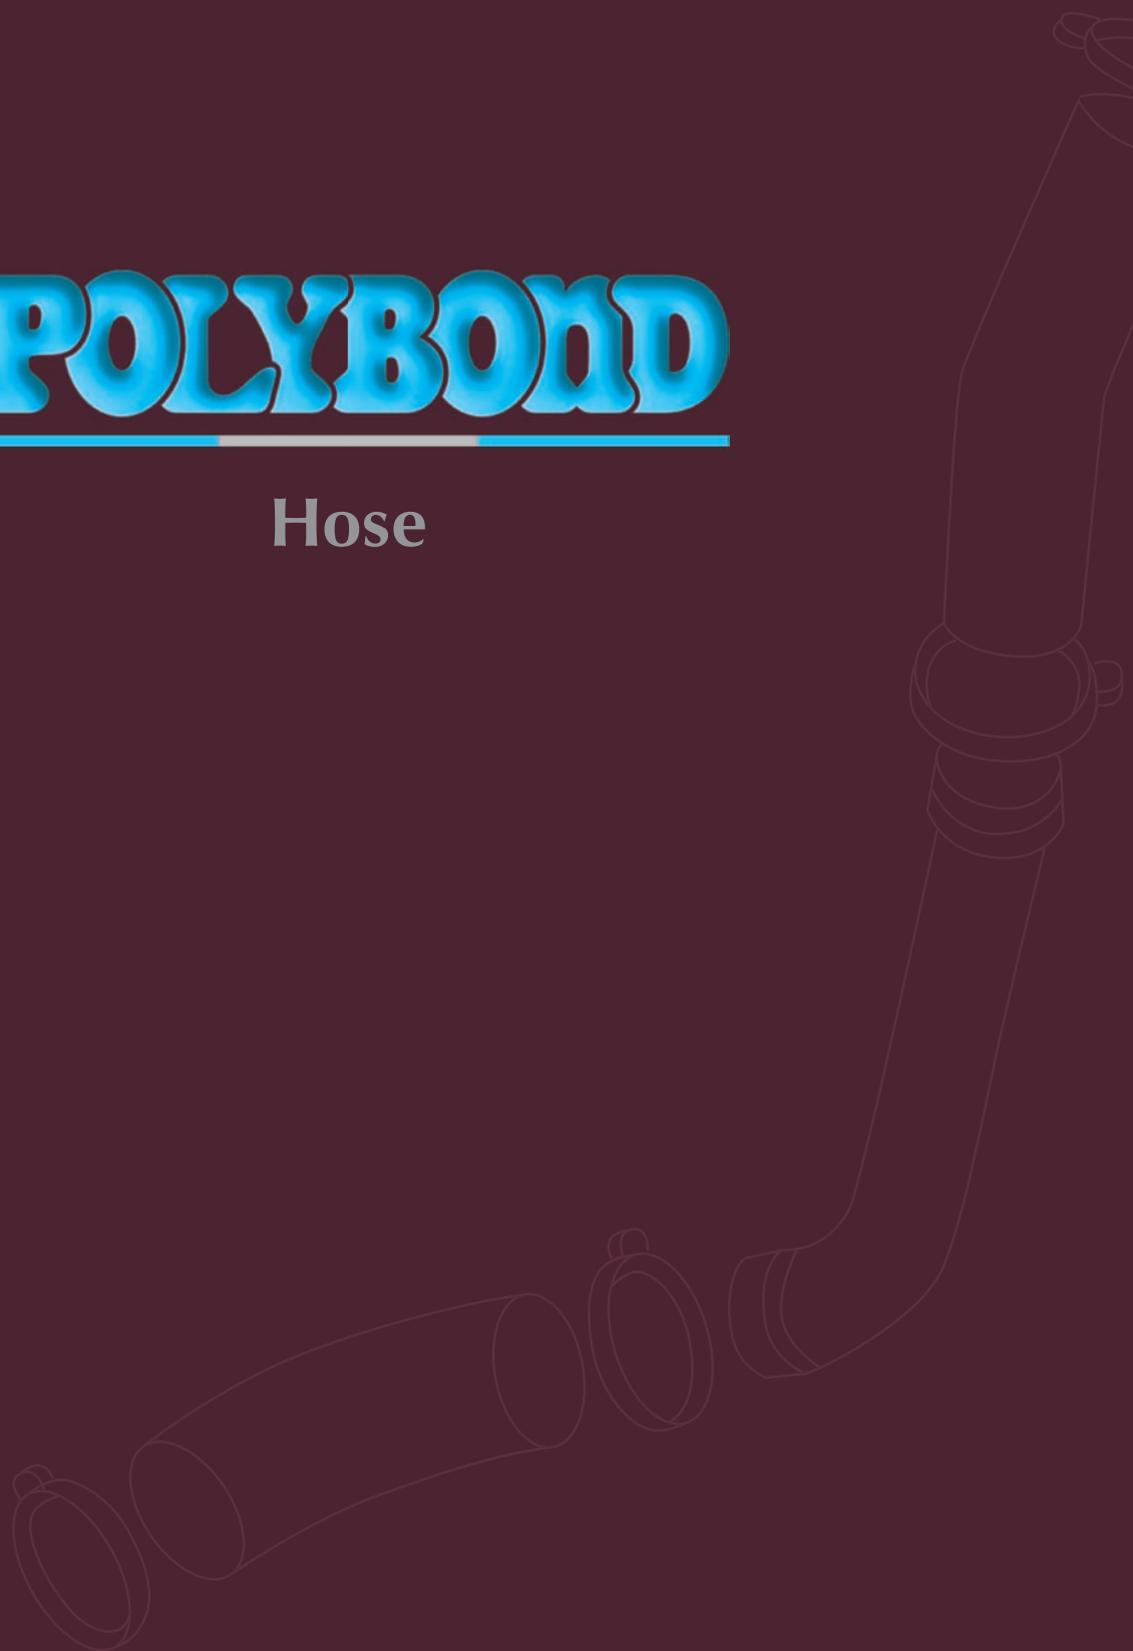

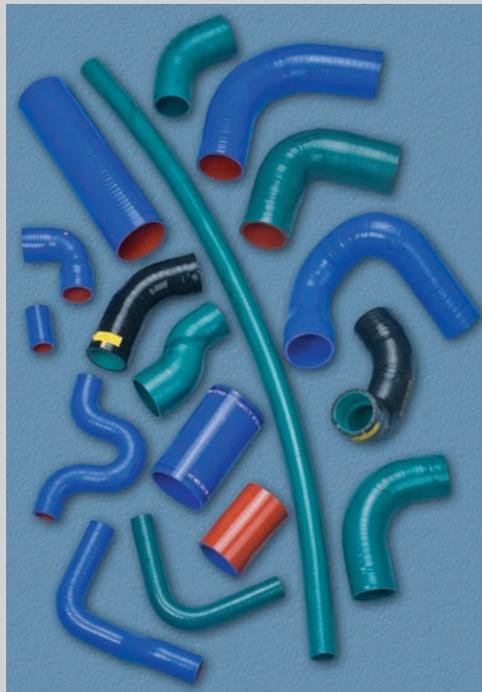

Your Source for Customized Performance Hose

- Operating temperatures up to 260° C (500°F)
- 2, 3 or 4 ply reinforcement
- Choice of Polyester, Nomex®, Kevlar®, Nylon or Fiberglass reinforcement
- Fluorocarbon and Fluorosilicon lined hoses
- Intercooler, Charge-Air, Heater, Turbocharger and Coolant applications
- In-house testing capability for endurance performance of wide temperature range
- Tested to global automotive and truck standards
- World-class manufacturing facility certified to ISO9000, TS16949 and ISO 14001 standards



www.polybondindia.com

mkt.polybond@rathigroup.com